


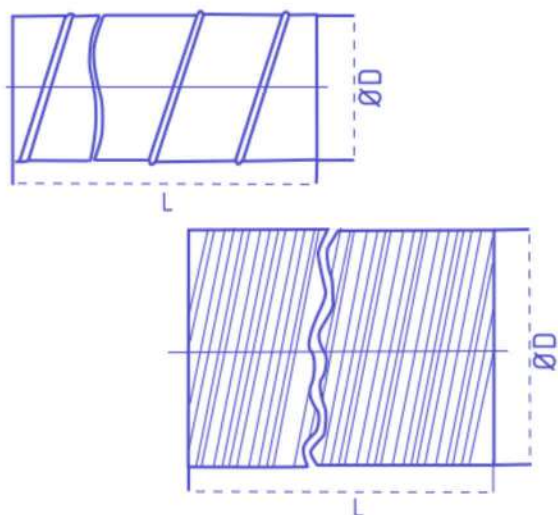


Dimensions

diameter	metal thickness	length (m)
Ø 100	0.5	1, 3, 6
Ø 125	0.5	1, 3, 6
Ø 160	0.5	1, 3, 6
Ø 200	0.5	1, 3, 6
Ø 250	0.5	1, 3, 6
Ø 300	0.5	1, 3, 6
Ø 315	0.5	1, 3, 6
Ø 355	0.5	1, 3, 6
Ø 400	0.6	1, 3, 6
Ø 450	0.6	1, 3, 6
Ø 500	0.6	1, 3, 6
Ø 560	0.6	1, 3, 6
Ø 600	0.6	1, 3, 6
Ø 630	0.6	1, 3, 6
Ø 710	0.9	1, 3, 6
Ø 800	0.9	1, 3, 6
Ø 900	0.9	1, 3, 6
Ø 1000	0.9	1, 3, 6
Ø 1120	0.9	1, 3, 6
Ø 1250	0.9	1, 3, 6

Description

Circular ducts are produced on certified SPIRO® equipment, available in diameters starting from 100mm to 1250mm, thickness of metal sheet varies depending on exact diameter of the duct.

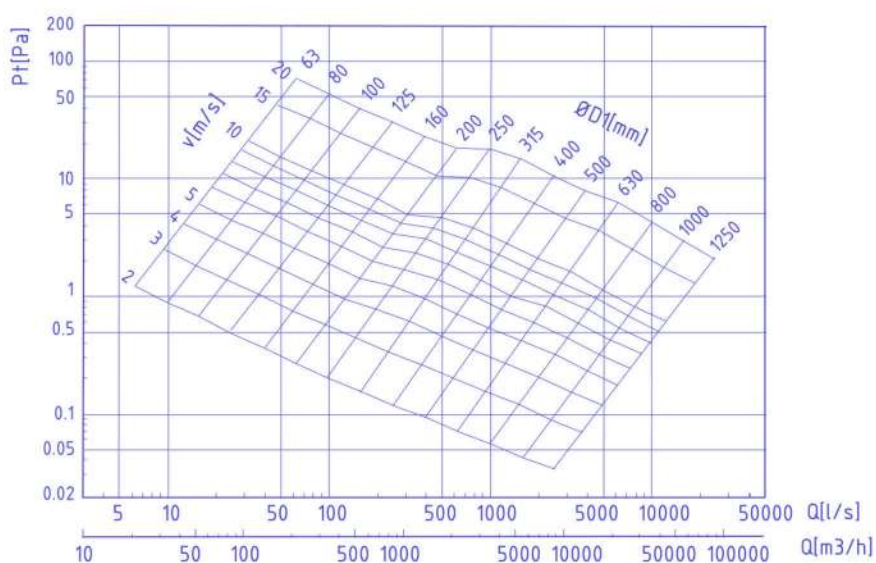

Order example:

SPIRO- Ød - 1/3/6

type

diameter

length