


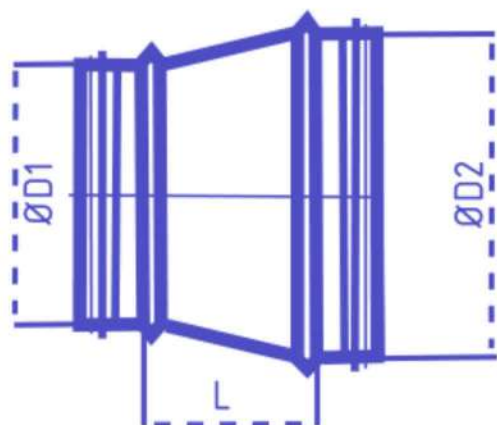


Description

The main function of circular reductions is changing of one diameter to another.

Also, part with smaller diameter may be used for increasing flow rate in the whole system, as well as part with bigger diameter can act as an air diffuser.

It is produced along with rubber gasket to ensure necessary level of tightness.

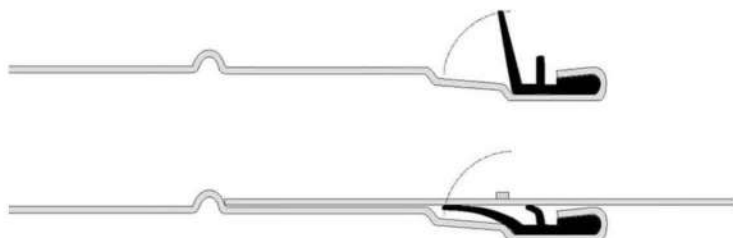

Order example:

RLL- ØD1 - ØD2

type

diameter

diameter

Dimensions

D1	D2	length	weight	D1	D2	length	weight	D1	D2	length	weight
125	100	156	0.34	450	250	485	2.99	710	355	770	9.44
150	100	196	0.45	300	405	2.74		400	715	9.06	
125	156	0.43		315	385	2.67		450	635	8.45	
160	100	216	0.51	355	320	2.39		500	555	7.75	
125	176	0.49		400	260	2.11		560	455	6.76	
180	100	246	0.62	200	628	3.82		600	395	6.11	
125	206	0.60		500	250	565	3.69	630	345	5.53	
160	166	0.59		300	485	3.43		800	400	855	11.6
200	100	276	0.74	315	465	3.36		450	775	11.0	
125	236	0.71		355	400	3.09		500	695	10.3	
160	181	0.64		400	340	2.80		560	600	9.36	
250	100	373	1.18	450	260	2.36		600	535	8.65	
125	333	1.15		250	665	4.60		630	490	8.13	
160	278	1.07		560	300	585	4.35	710	395	7.62	
200	213	0.94		315	560	4.25		900	450	935	14.2
300	125	413	1.58	355	495	3.98		500	855	13.5	
160	358	1.49		400	440	3.73		560	760	12.6	
200	293	1.37		450	360	3.29		600	695	11.9	
250	230	1.25		500	280	2.79		630	650	11.3	
315	125	438	1.72	250	725	5.24		710	555	10.8	
160	383	1.64		600	300	645	4.98	800	410	8.85	
200	318	1.51		315	625	4.91		1000	500	1030	20.7
250	255	1.39		355	560	4.64		560	935	19.5	
300	190	1.19		400	500	4.36		600	870	18.6	
355	160	448	2.05	450	420	3.92		630	825	18.0	
200	383	1.92		500	340	3.42		710	730	17.0	
250	320	1.79		560	245	2.74		800	585	14.4	
300	240	1.53		250	775	5.77		900	425	11.2	
315	215	1.44		630	300	695	5.51	1250	600	1270	31.4
400	160	533	2.63	315	670	5.42		630	1225	30.8	
200	468	2.50		355	605	5.14		710	1130	29.8	
250	405	2.37		400	550	4.89		800	985	27.2	
300	325	2.11		450	470	4.46		900	825	24.9	
315	305	2.04		500	390	3.96		1000	680	20.8	
355	240	1.76		560	295	3.28					
450	200	548	3.13	600	230	3.00					

